




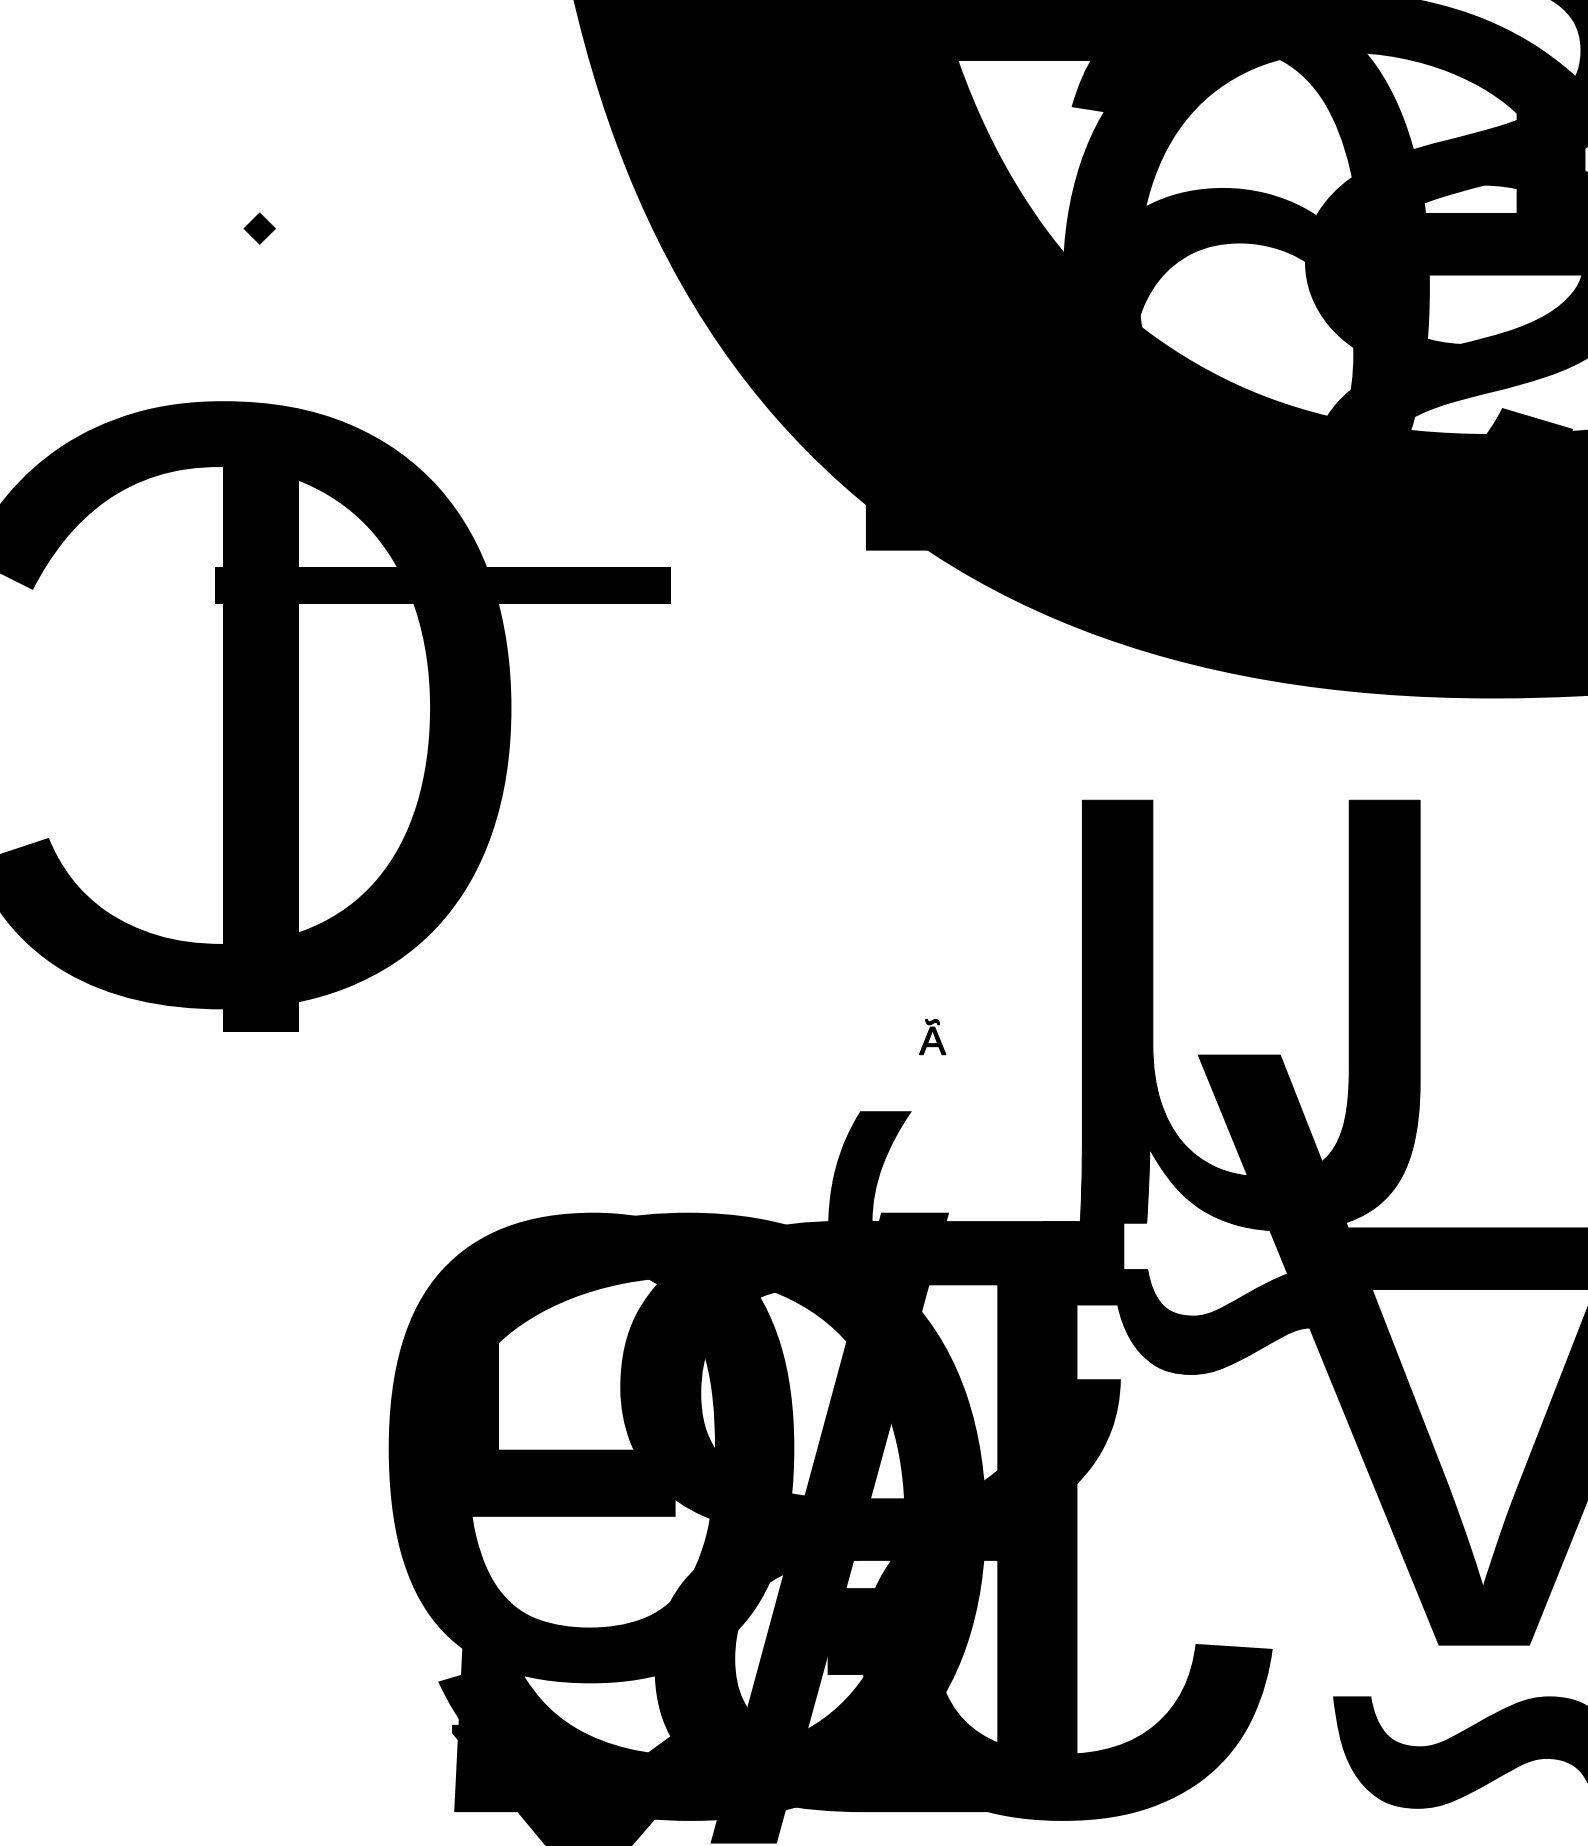

.....


2005

ó

ó ë

ë ô

-

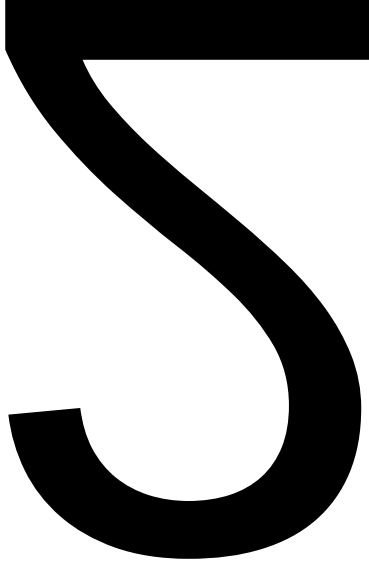

UHV-700

1A 500A

6A 150A

1.

5.



P¹/₄

3.

1

, 3




3

4



4

5:

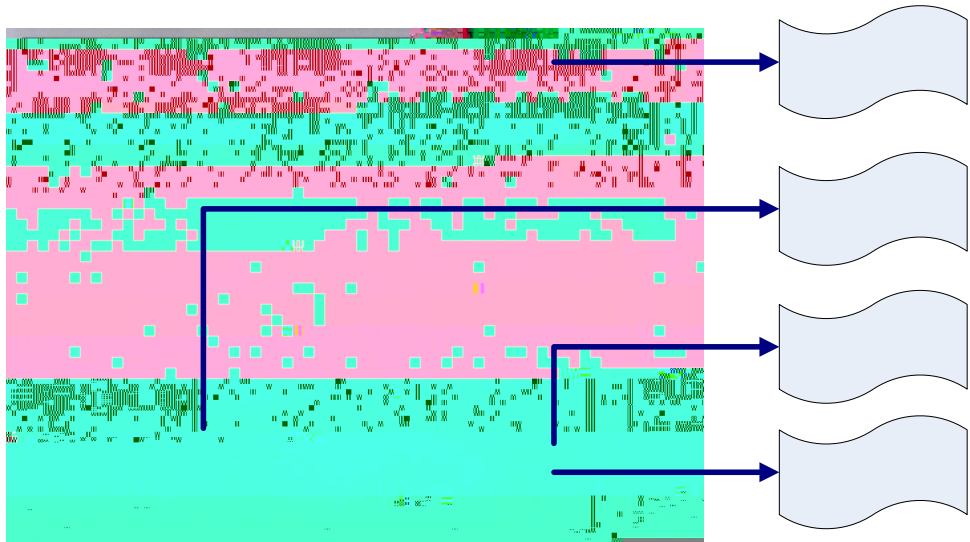

0-500A

7:

电流A	倍数	时间s	试验时刻	↑
63.0	1.45	125.404	11-11-25 11:43:41	
共001条 63.0 1.45 125.404 11-11-25 11:43:41 第001页 第001条 ↓				
额定电流:001.0A		请合上空开! 开始 返回		
电流倍数:01.00				
试验时间:3600 s		清除	设置	试验

7

>

5

0-500A

,

7:


电流A	倍数	时间s	试验时刻	↑
63.0	1.45	125.404	11-11-25 11:43:41	
共001条 63.0 1.45 125.404 11-11-25 11:43:41 第001页 第001条 ↓				
额定电流:001.0A		请合上空开! 开始 返回		
电流倍数:01.00				
试验时间:3600 s		清除	设置	试验

8


>

6

, 9:

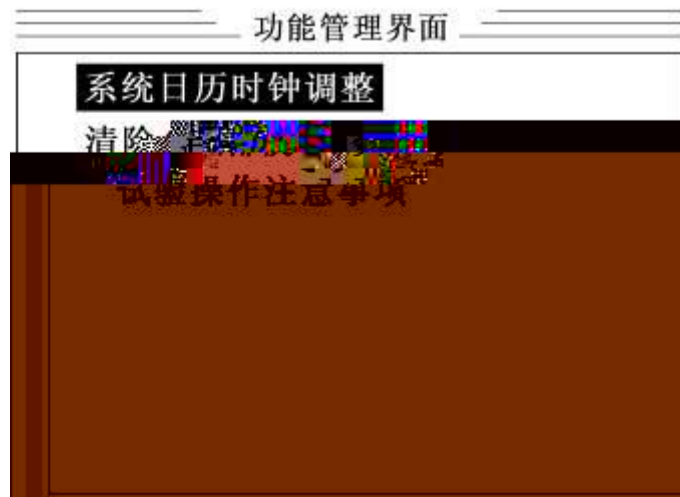

1. PC

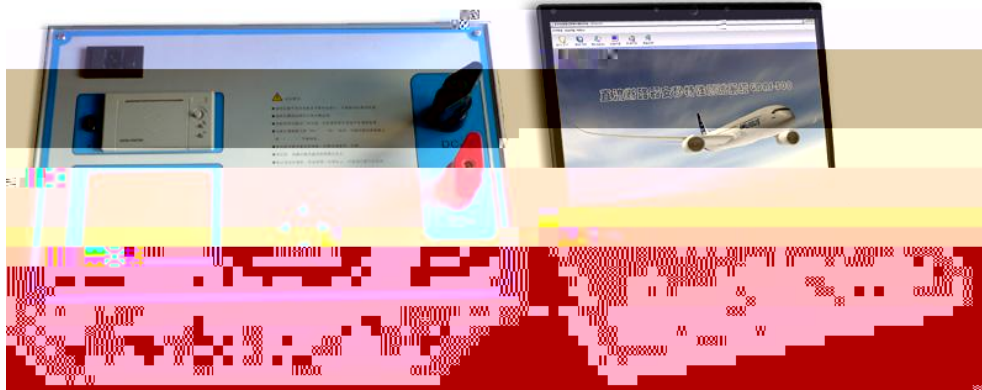

10

PC

RS232

PC

USB-RS232

2. PC

PC

11

1

2

PC

3

EXCEL

EXCEL

13



13

4

14

文件名: 981...1

打印时间: 2011-11-25 14:40:29

额定电压: 1.0kV 型号: C型

动稳定和热稳定电流

序号	额定电压 (kV)	额定电流 (A)	额定短路电流 (kA)	额定短路开断电流 (kA)
1	10	18.684	18.747	18.634
2	10	4.00	10.687	10.796
3	10	8.00	3.969	3.961
4	10	16.00	1.303	1.311
5	10	32.00	0.765	0.746
6	10	64.00	0.575	0.547
7	10	128.00	0.343	0.347
8	10	256.00	0.214	0.214
9	10	512.00	0.134	0.134
10	10	1024.00	0.084	0.084
11	10	2048.00	0.052	0.052
12	10	4096.00	0.032	0.032
13	10	8192.00	0.020	0.020
14	10	16384.00	0.012	0.012
15	10	32768.00	0.008	0.008
16	10	65536.00	0.005	0.005
17	10	131072.00	0.003	0.003
18	10	262144.00	0.002	0.002
19	10	524288.00	0.001	0.001
20	10	1048576.00	0.001	0.001


5

6

7

4.

15

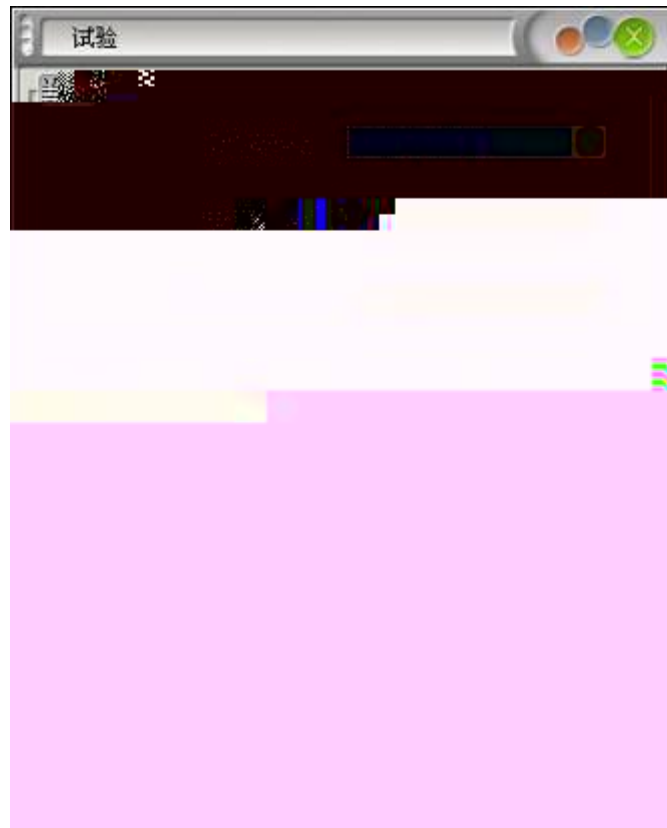

16

PC

B

C

10

1.

$\hat{0}$

2.

3.

4.

5.

,