



—

,« Q 7J "XQ T2' ppa 'EaT2' p -C V•5€
+ K

DL / T 2157-2020


DL/T976-2017

DL/T1476-2015

RS232

RS485

Linux

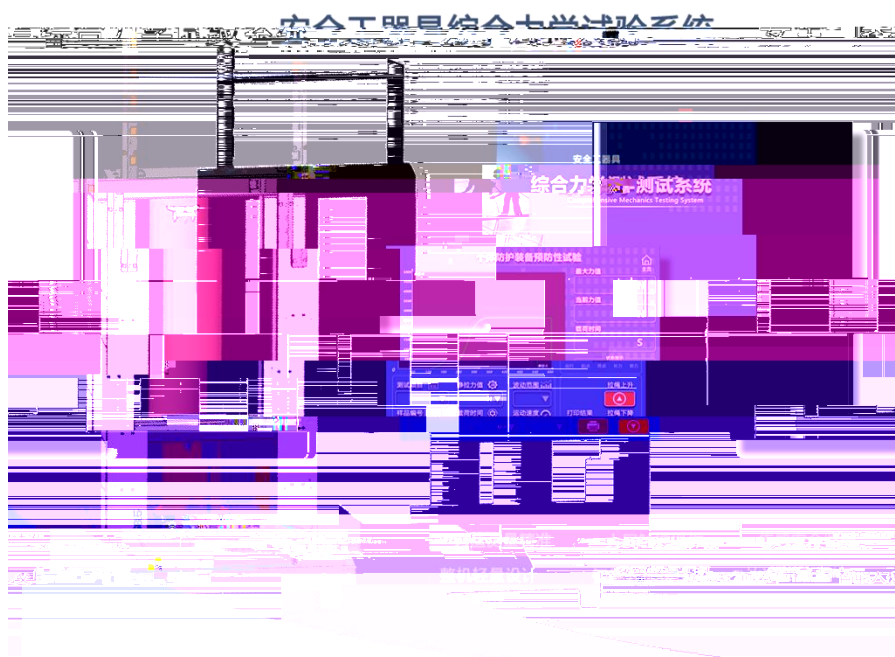

0~20kN 30kN/50kN

± 1%

≤ 2800mm

0~20kN 30kN/50kN

$\pm 1\%$

$\leq 3000\text{mm}$

$\leq 2000\text{mm}$

Linux

15

58mm

USB

RS232

RS485

AC 220V, 50Hz

800W

1000mm*1200mm*1850mm


		5kN	$\pm 1\%$	$\leq 2800\text{mm}$

		20kN	$\pm 1\%$	$\leq 2000\text{mm}$
		5kN	$\pm 1\%$	$\leq 3000\text{mm}$
		50kN	$\pm 1\%$	$\leq 3000\text{mm}$
	15			
	58mm			
	USB RS232 RS485			
	AC 220V ,50Hz 800W			
	1000mm*1200mm*1850mm			
	* * *15 * * * 50KN			

		()	1	1600	1
--	--	-----	---	------	---

1

!

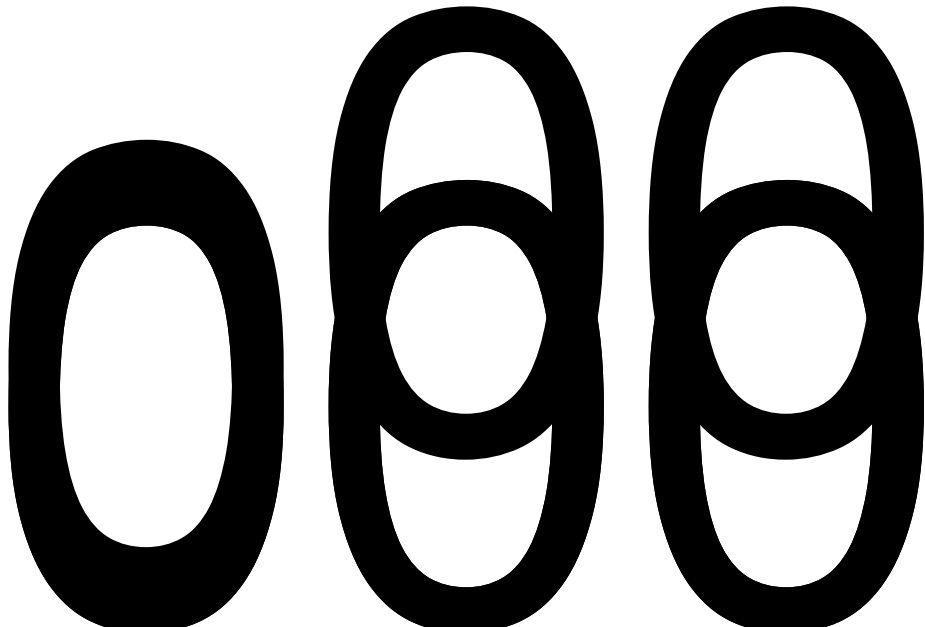

4.1.1

1

2



3

4.1.2

(1)

(2)

(1) “ ” “ ”



(2)

“ ” “ ”

(3) “ ”

“ ” “ ” “ ” “ ”

(4)

(5)

(6)

(1)



(2)


(3)

(4)

(5) “ ”


(6) “ ” “ ”

(1) “ ” “ ”

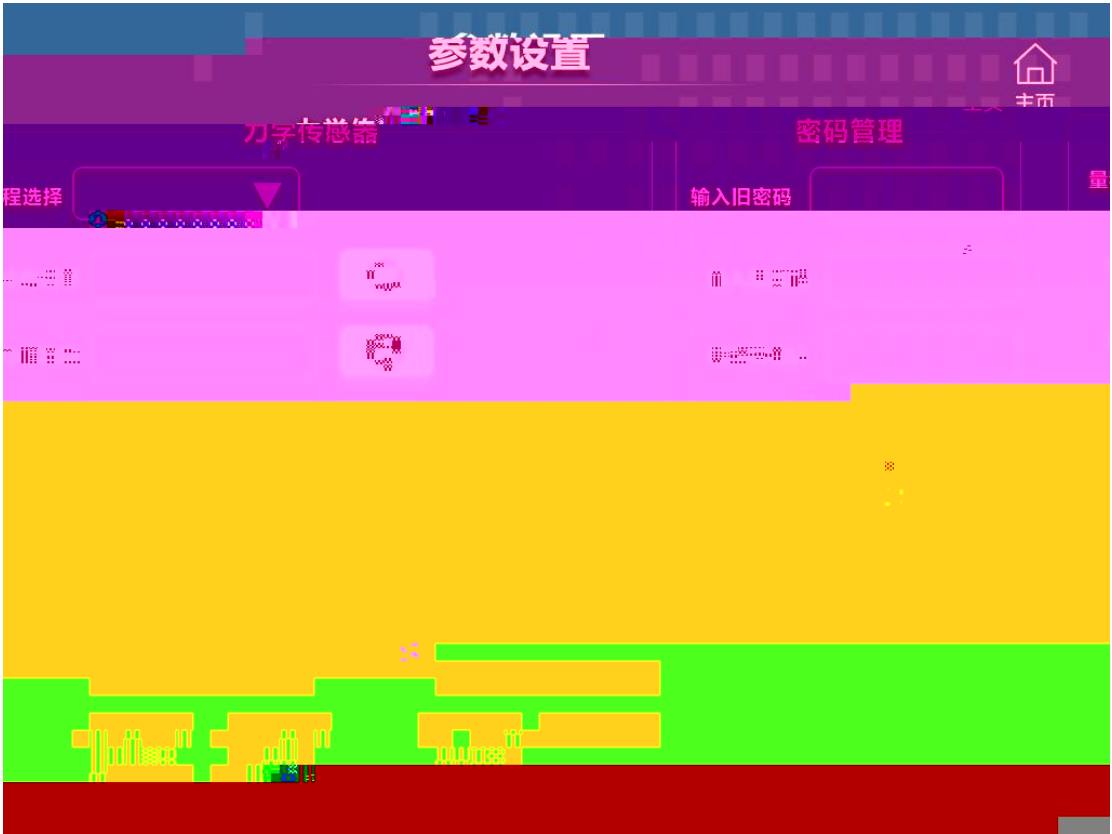

(2) “ ” “ ” “ ” “ ” “ ” “ ”

(1) “ ” “ ” “ ” “ ”

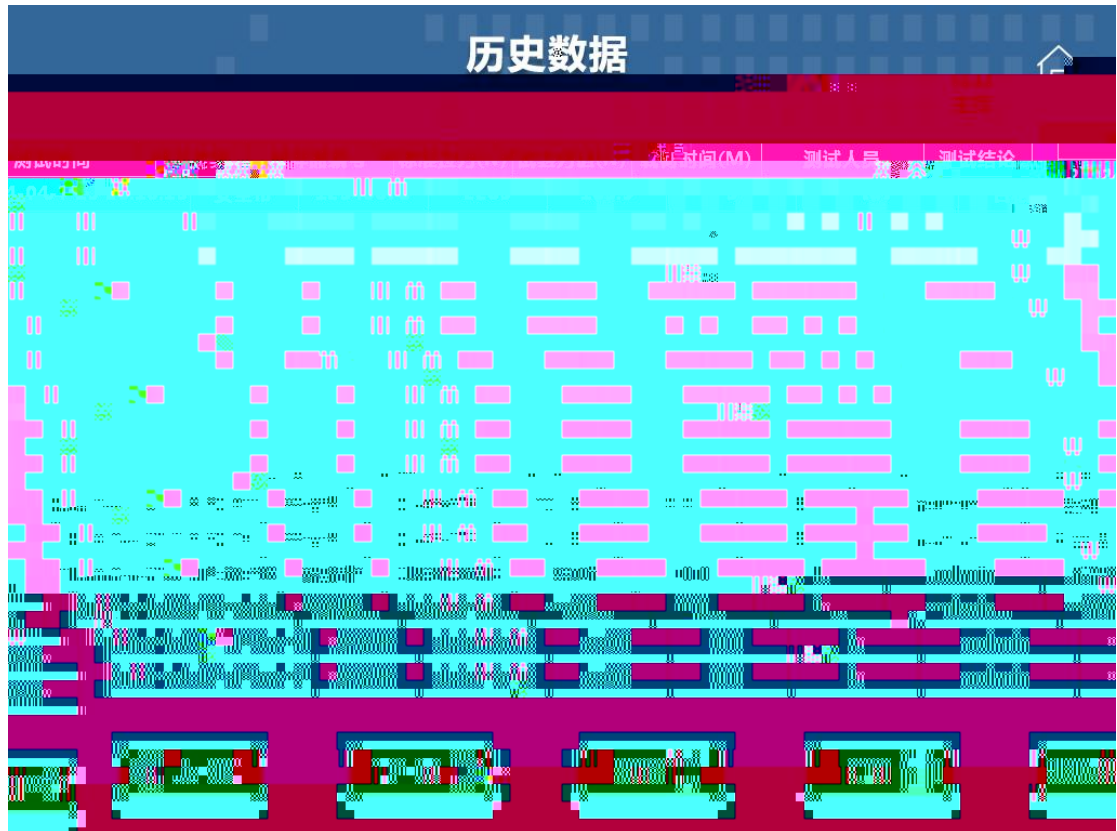

(2) “ ” “ ” “ ”

(3) U “ ”

DL / T 2157-2020

DL/T976-2017

DL/T1476-2015

GB4793.1-2007