



	5
.....	5
.....	7
.....	8
.....	14
.....	15
.....	17
.....	17
.....	18
.....	18
.....	19
.....	20
.....	21

n

1

20 -120

2.

3.

4

5.

6.

7.

8.

9 320*240

10

11.

0 40


30W()150W

0 40

25 <85%

≤ 6Kg

37cm × 28cm × 16cm

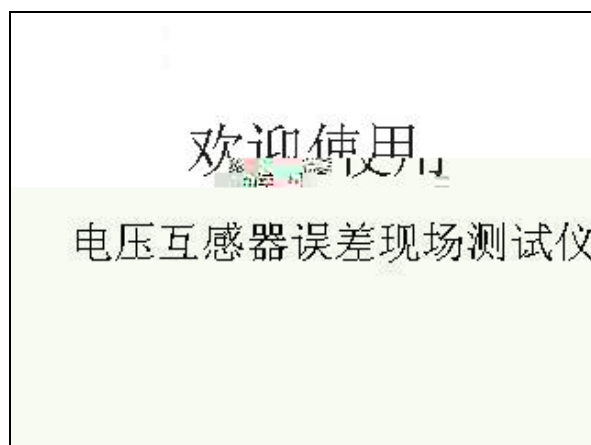

“ ” _____

“ ” _____

“ ” _____

“ ” _____

“ ↑ ” “ ↓ ” “ ”

电磁式电压互感器			
准确级			
额定电压			
额定容量			
额定负荷			
功率因数	0.80		
用户编号			
实际负荷			
测量			
2012-10-19-10:15:10			

“ ↑ ” “ ↓ ”

“ ”

“ ”

“ ↑ ” “ ↓ ”

“ ”

“ ”

1


“ ↑ ” “ ↓ ”

“ ”

”

“ ”

”

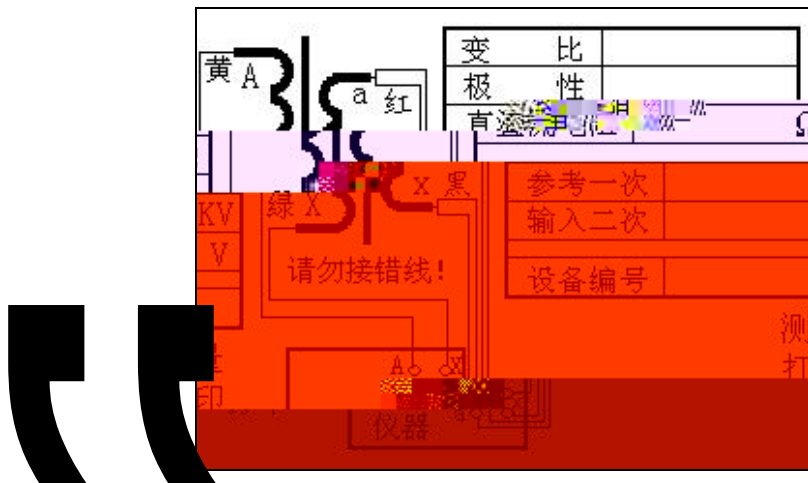

“ ↑ ” “ ↓ ”

“ ”

“ ”

“ ”

“ ”

“

“ ”

“ ↑ ” “ ↓ ”

“ ”

“ ”


2 PT

“ ↑ ” “ ↓ ”

“ PT ”

“ ”

”

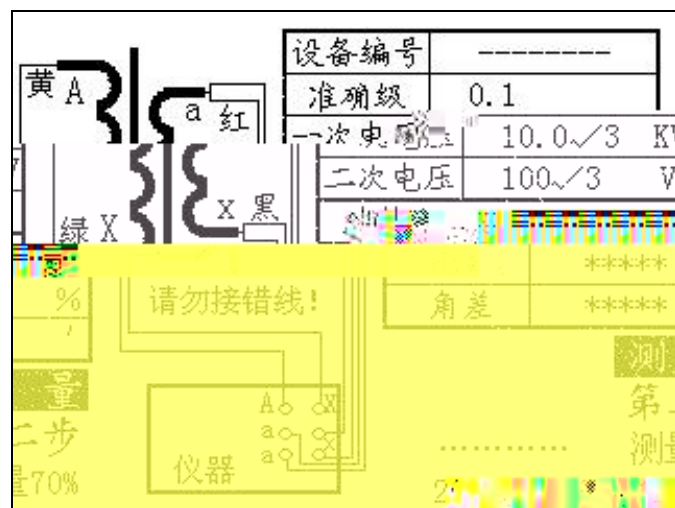

“ ↑ ” “ ↓ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ” “ ” “ ” “ ” “ ”

1


2

3


4

“ ”

“ ”

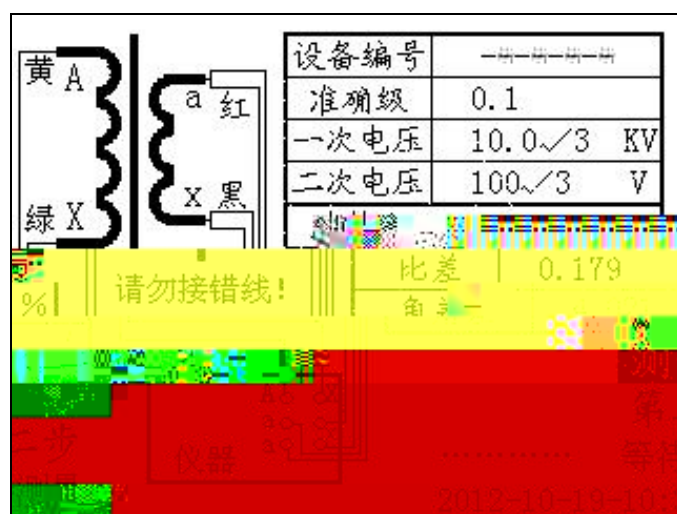


“ ↑ ” “ ↓ ” “ ” “ ”

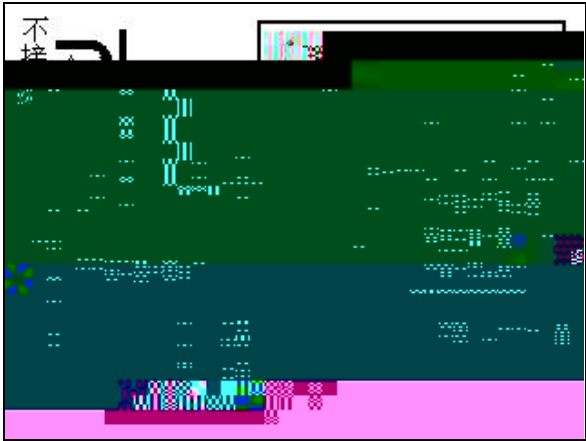

“ X ”

“ ↑ ” “ ↓ ” “ ” “ ”

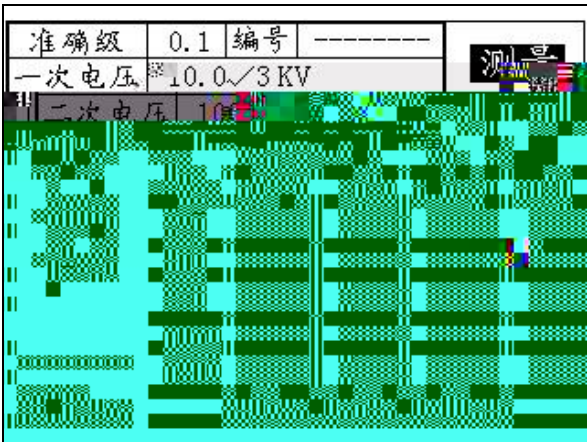

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ”

“ ” “ ” “ ”

准确级	0.1	编号	-----	测量
一次电压	10.0/3 KV			
二次电压	100V			
修约	50	-0.484	4.39	-0.080
	80	-0.484	5.99	-0.130

“ ↑ ” “ ↓ ” “ ” “ ” “ ” “ ” “ ”

4

“ PT ”

“ ”


“ ” “ PT ”

“ PT ”

5

“ ”

“ ↑ ” “ ↓ ” “ ” “ ”

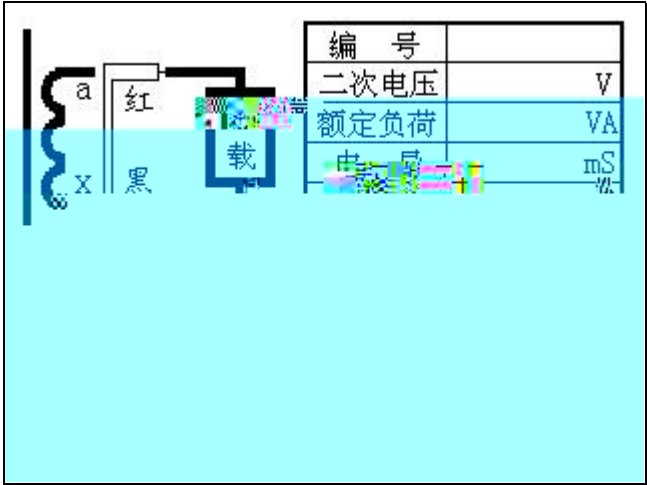

“ ↑ ” “ ↓ ” “ ” “ ”

“ ↑ ” “ ↓ ” “ ” “ ”

检定该仪器时，推荐采用以下两种方法进行检定。

一、与传统方法测试数据进行比对。

二、用整检装置进行电压检定。

定该仪器中四组电压的精度

比 差


角 差

检 定

检 定

“ ↑ ” “ ↓ ”

“ ”

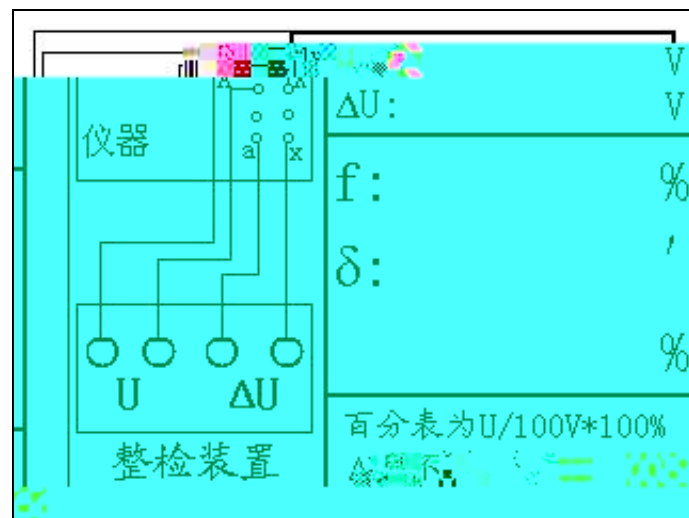

“ ”

“ ” “ ” “ ” “ ”

存储编号		上一记录
1	-----	下一记录
2	8-----	


“ ”

“ ”

“ ”

准确级	0.1	编号	-----	上一页
一次电压	10.0/√3 KV			
二次电压	100 V			

“ ”

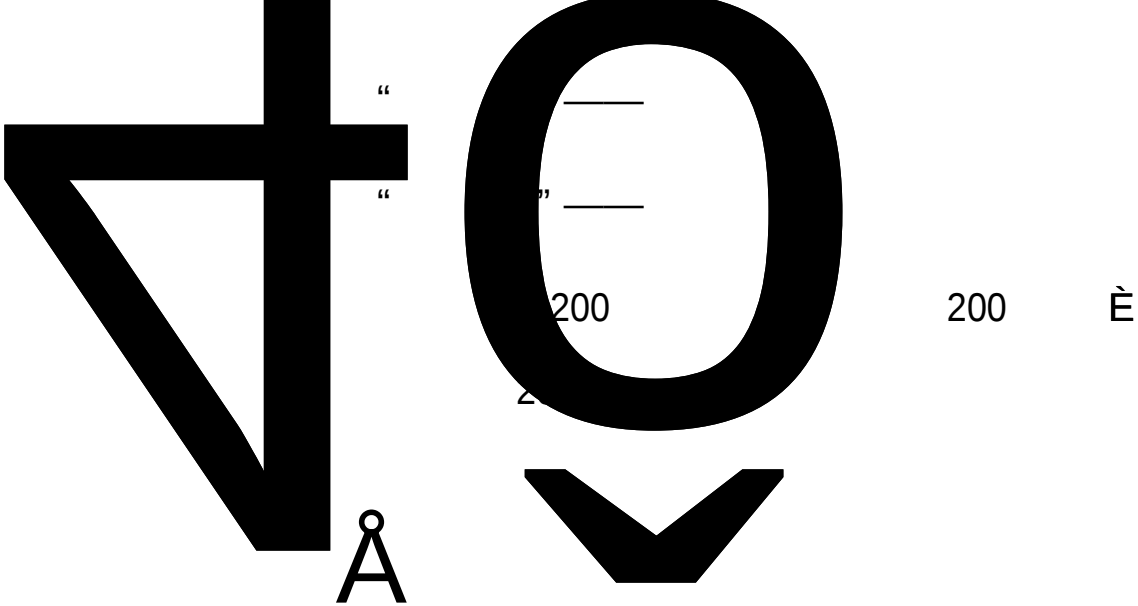

3.

“ ”

4.

“ ”

5.

“ ”

1

1

4

2

3A

3

1

1

1

JJG 314-2010«

»

PT

PT

PT

0.

1

2 1-3

3

4

5

$$\varepsilon = \varepsilon_d + \Delta \varepsilon - Z_1' + Z_2 \quad Y$$

$$\varepsilon_d$$


$$\Delta \varepsilon \quad Z_1' \quad \Delta Y$$

$$Z_1' + Z_2$$


$$Y$$

$$Y=1/Z$$

1.



2.



3.

