




“ ”

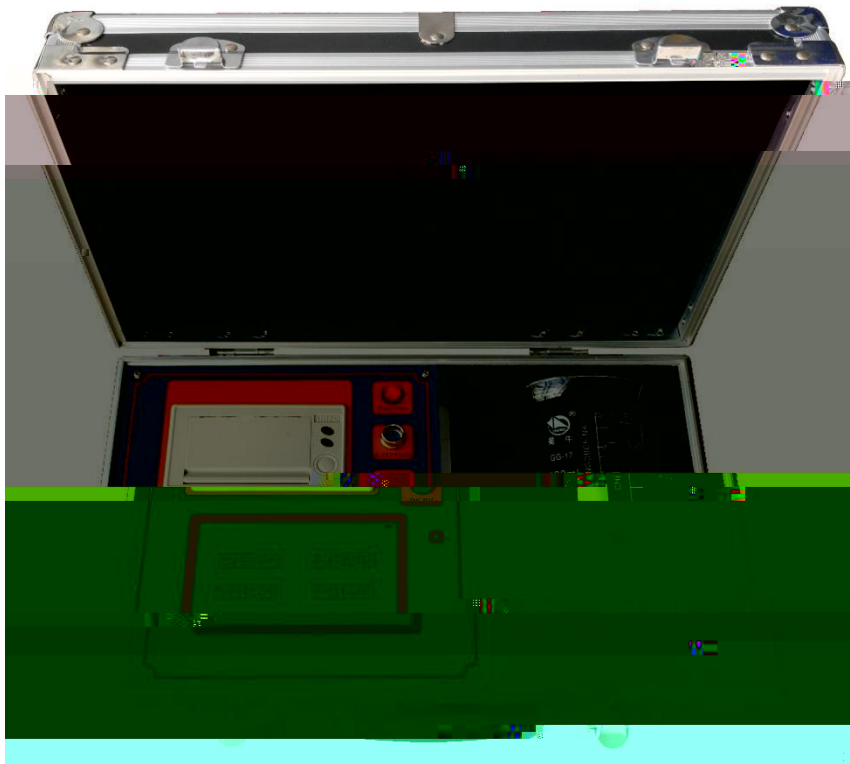

∞

1) 2.5s/

2) 0.0001mg/cm^2 9.9999mg/cm^2

3)

4) $480 \cdot 272$

5)

6)	20	ESDD
----	----	------

7)

8)	ESDD	ESDD
----	------	------

9) 10 U

10)

11) 2600mAh


 ∞

3.1

 $\ddot{O} \quad \ddot{O}$

3.2

 $\pm$
$$\tilde{O} \quad \pm \quad \tilde{O}$$

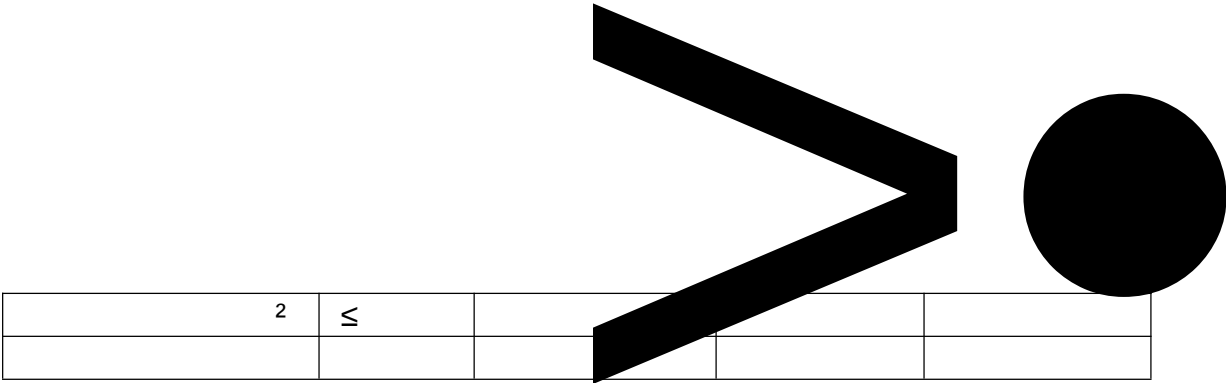

4.2.2


$\wedge 1^{\circ} N^{\circ} \tilde{n} B \bullet \varnothing P \# y Y e 0 0$

4.2.3

Ã

∞

5.1

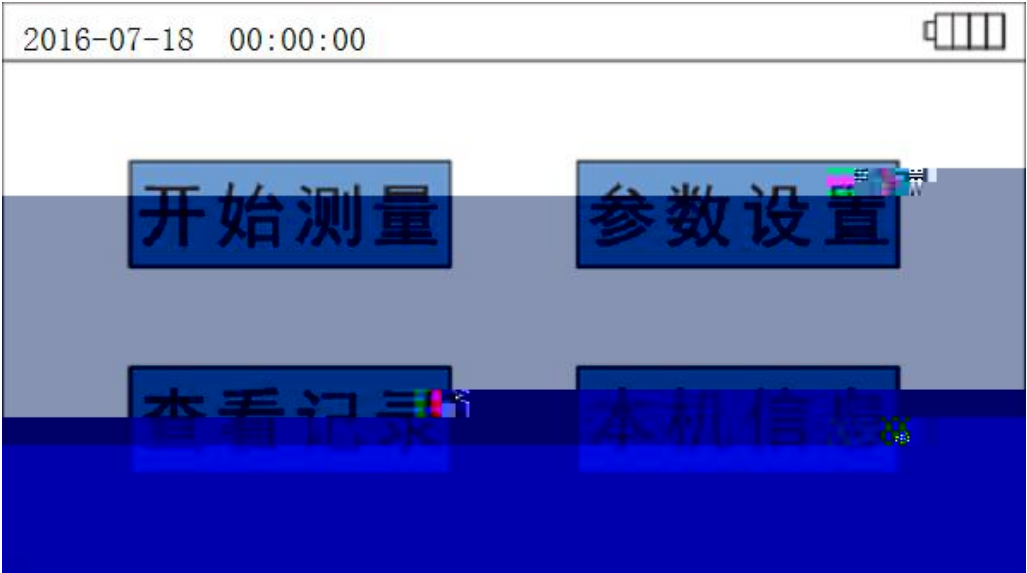

5.2

“

”

“

”

“

”

2016-07-18 00:00:00

盐密度: 0.0000mg/cm²

电导率: 0.13us/cm

温度: 26.6℃

污秽等级度 (Q/GDW 152) : a

污秽等级度 (GB/T 16434) : 0

统一爬电比距: 22.25mm/kV


打印结果

保存结果

返回

	0.0000	mg/cm ²	
	0.13	us/cm	
	26.6		

5.3 (1) (1)

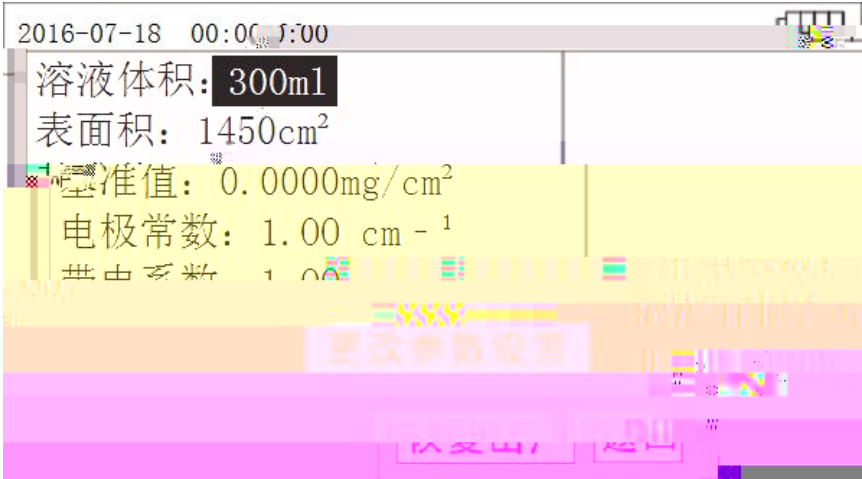


“ ”

“ ”

			cm ²	
			mg/cm ²	


(2)

(2)

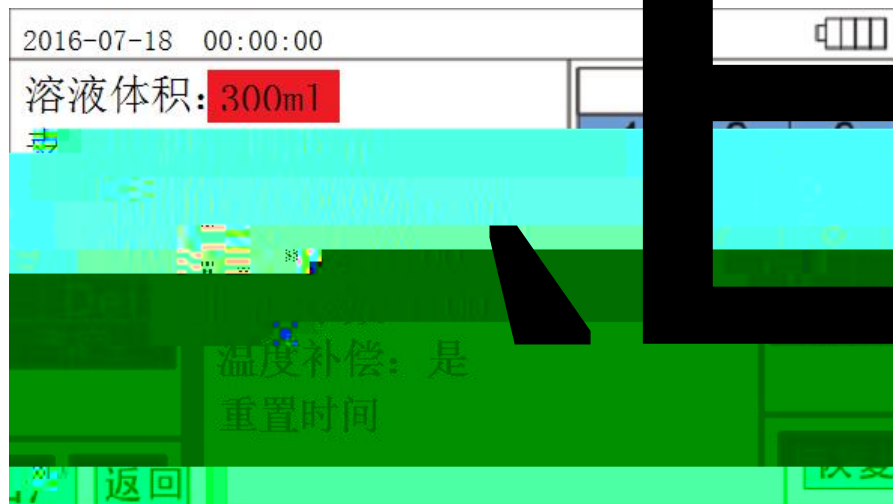

--	--

“ ”

2016-07-18 00:00:00 

盐密度	0.0000ml/cm2	温度	36.0℃
电导率	0.09us/cm	污秽等级	a
溶液体积	300ml	表面积	1450cm2


 

打印当前

基准值	0.0000ml/cm2	温度补偿	是
电极常数	1.00cm-1	带电系数	1.00
编号	108		

时间: 2016/07/18 08:51:01

存储空间: 108/100000

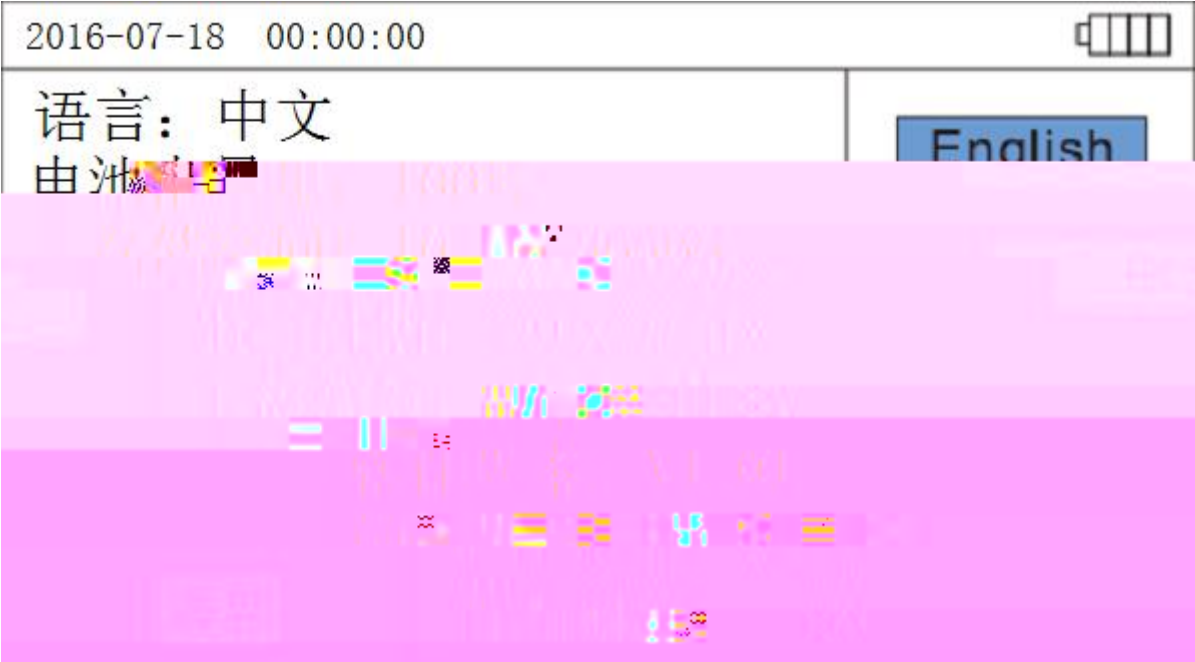


100%	
108/100000	108100000
2016/07/18	
05DDFF37	
V1.01	
V2.1	
English	
	“ ” “ ”

∞

a)

	1	∞	
			∞
0	50km	≤ 0.03	—
	10km 50km ()	0.03 0.06	≤ 0.06
	3km 10km ()	0.06 0.10	0.06 0.10
	1km 3km 300m 1500m	0.10 0.25	0.10 0.25
	1km 300m	0.25 0.35	0.25 0.35

Q/GDW 152-2006

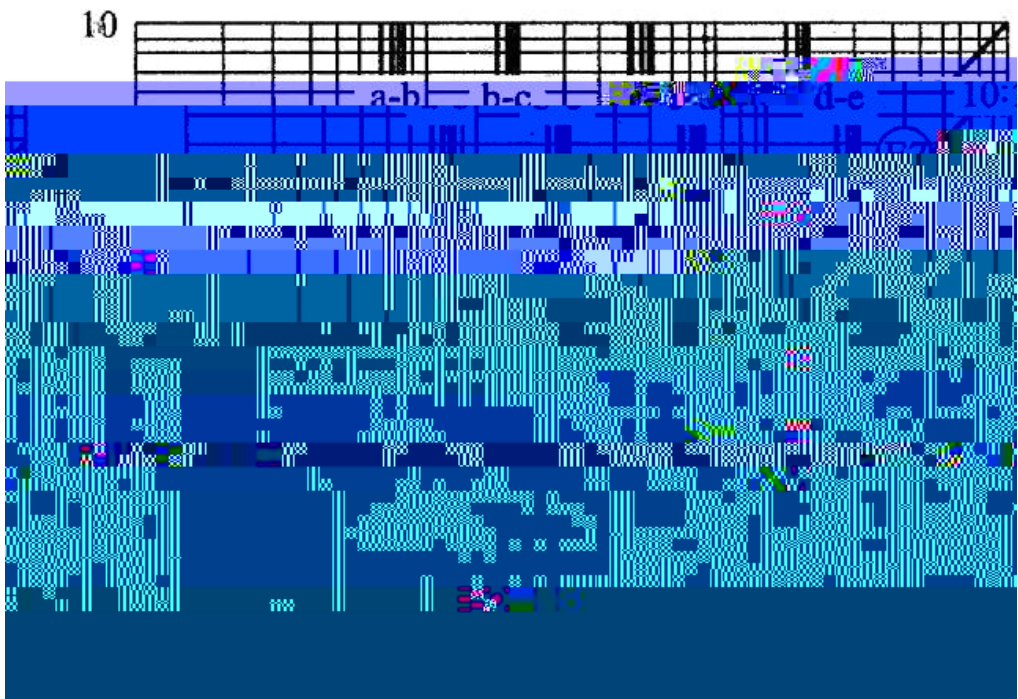

mg/cm²

1

/


1 E1 E7 1 7 a-b b-c c-d d-e

2 10:1 5:1 2:1


GB/T16434 – 1996

2

		∞

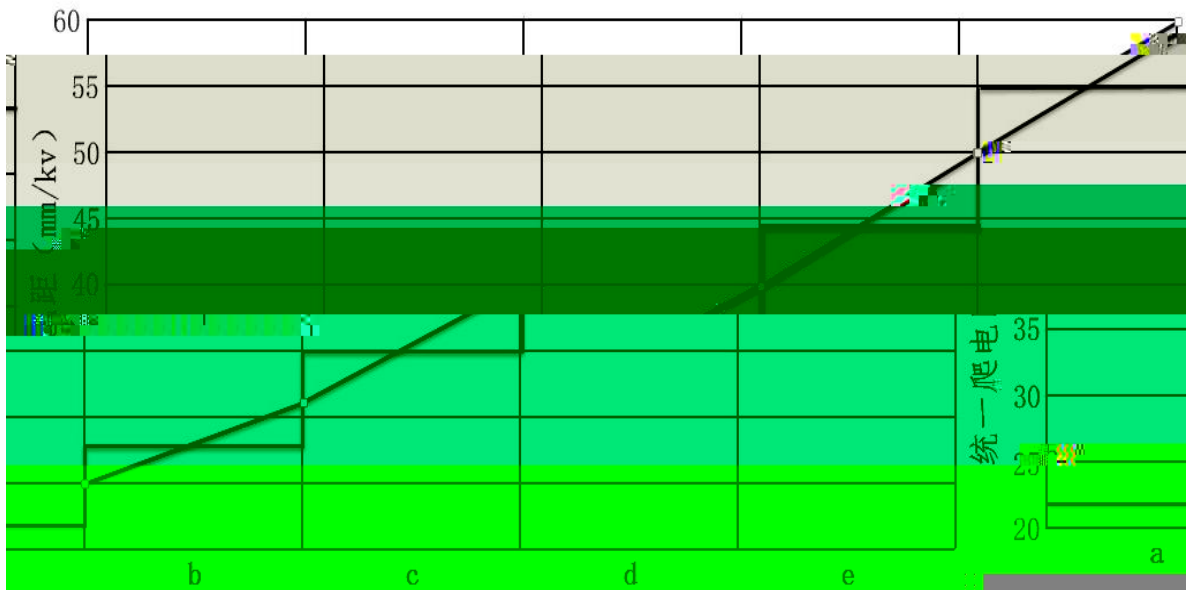

2

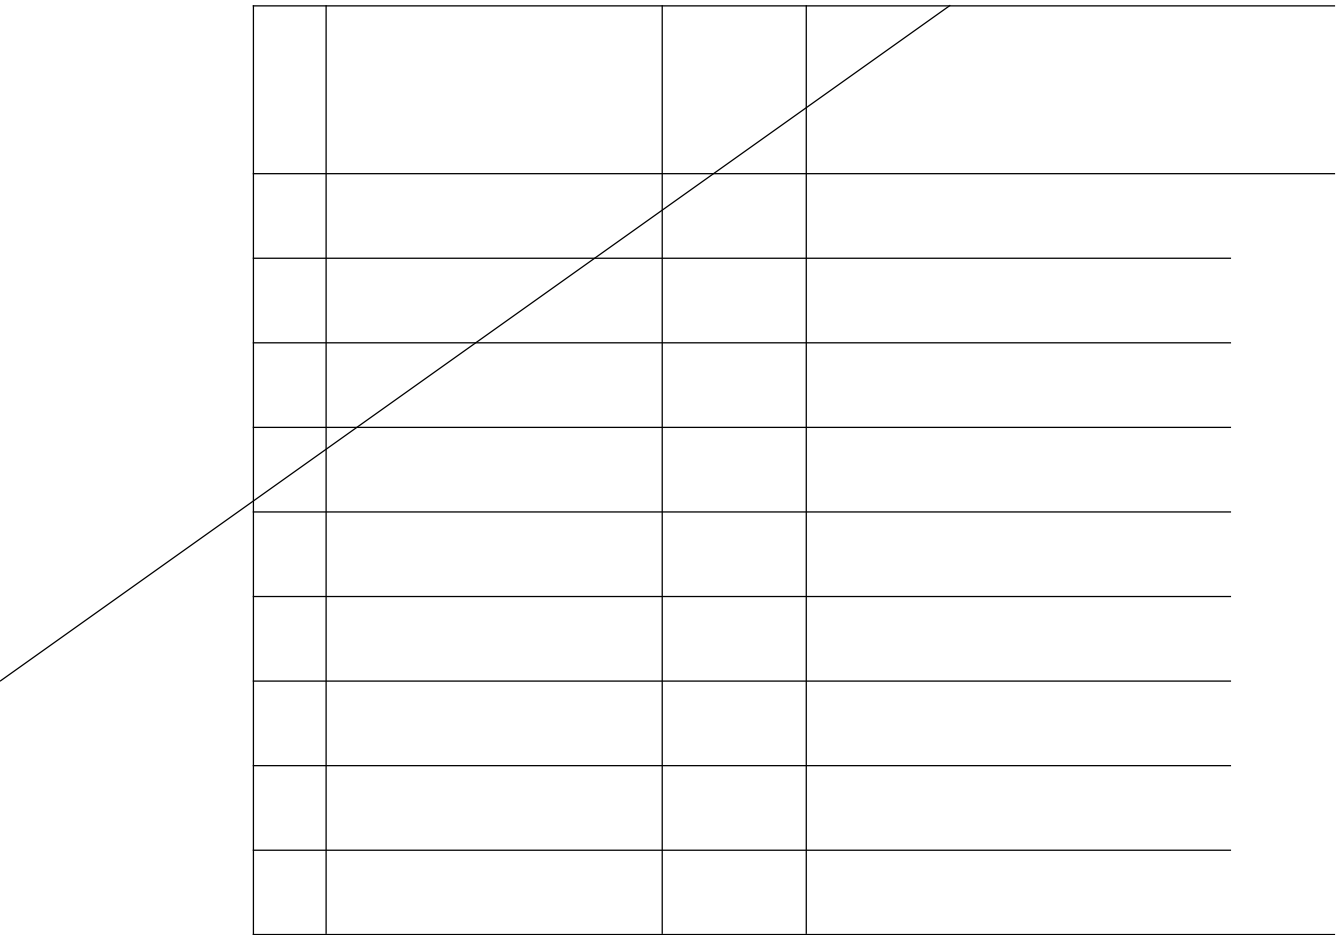

[illegible]

	mm	mm	mm	cm ²
XP-16	255	155	305	1630
XP-16	254	155	290	1530
XP3-16	280	155	350	2006
XP-16D	280	160	370	1965
XP-16D1	280	155	330	2019
XP-16D2	300	155	300	1965
XP-16D3	300	155	400	2275
XP-16D4	300	155	400	2675
XP-21	280	170	335	1892
XP-21	280	170	320	1974
XP-30	320	195	370	2455
XP-30	320	195	350	2462
XW-4.5	254	180	450	2200
XW-4.5	254	170	440	2080

	()	cm ²	cm ²	cm ²	
1	CA-774EZ(210)			3754	NGK
2	CA-772EZ(160)	2900	845	3745	
3	CA-776EZ(300)	3951	1268	5219	
4	CA-765EZ(300)	2055	3055	5110	
5	CA-735EZ(160)	1355	2295	3650	
6	CA-745EZ(210)	1355	2295	3650	
7	CA-765EZ(400)			3980	
8					